



Regd. Office & Factory :
Rajkot Road,
Hapa - 361 120
Dist. Jamnagar, (Gujarat) India.
Tel : +91 288 257 11 20/21
marketing@goldstarpower.com

Branch Office :
3, J. P. Estate, B/H. Sukh Sagar Hotel,
Sanand Cross Road, Sarkhej,
Ahmedabad - 382 210 (Gujarat) India.
Tel : +91 79 268 90 90 1
ahmedabad@goldstarpower.com



A PRODUCT OF GOLDSTAR POWER LIMITED
www.goldstarpower.com

 **100% Recyclable Green Technology**

 **Spill Proof**

 **Extreme Weather Performance**




Features

- Designed for Long Life.
- More Electrolyte per Ampere Hour.
- Low Maintenance.
- Factory charged and ready to use condition.
- Easy to monitor State of Charge.



Conditions of Fully Charged

- Make sure total Ah input is completed (Amp X duration = input Ah)
- 3 consecutive hourly readings of specific gravity and voltage becomes constant.
- Top of charge voltage will be around 15.5 V – 16.5V
- All cells should gas freely.

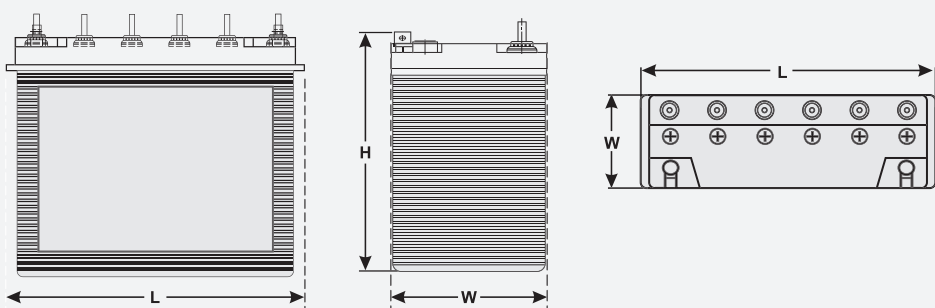

Conditions of Fully Charged

- UPS
- Solar
- Railway
- Inverter
- Telecommunication

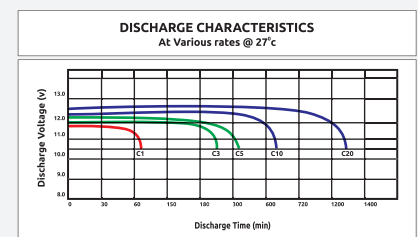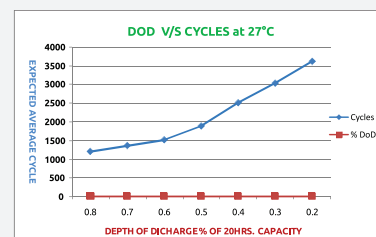

Battery Specification Chart

Battery Type	Container Type	Capacity in AH at 27°C		Dimensions ± 3 mm (mm)			Electrolyte Vol in Ltr.	Charging Current in (Amp.)	Gross Weight in (Kg.)±2%
		C20	C10	L	W	H			
TUBULAR SERIES									
GST-500	N 70z	50	40	306	172	234	6.0	5.0	20.00
GST-750	N 100	75	60	410	173	240	8.0	7.5	27.00
GST-1000	N 120	100	80	512	181	245	9.9	10.0	35.00
GST-1250	N 150	125	100	512	212	245	11.4	12.5	41.00
GST-1500	N 200 (J)	150	120	515	273	280	18.6	15.0	55.00
GST-1800	N 200 (J)	180	144	515	273	280	19.8	18.0	58.50
TALL TUBULAR SERIES									
GS-1000TT	IT 500	100	80	498	187	417	22.8	10.0	51.00
GS-1200TT	IT 500	120	96	498	187	417	22.8	12.0	53.00
GS-1500TT	IT 500	150	120	498	187	417	21.3	15.0	57.00
GS-1800TT	IT 500	180	144	498	187	417	21.3	18.0	60.00
GS-2000TT	IT 500	200	160	498	187	417	20.0	20.0	64.00
GS-2300TT	IT 500	230	184	498	187	417	19.5	23.0	67.00

