



Regd. Office & Factory :
Rajkot Road,
Hapa - 361 120
Dist. Jamnagar, (Gujarat) India.
Tel : +91 288 257 11 20/21
marketing@goldstarpower.com

Branch Office :
3, J. P. Estate, B/H. Sukh Sagar Hotel,
Sanand Cross Road, Sarkhej,
Ahmedabad - 382 210 (Gujarat) India.
Tel : +91 79 268 90 90 1
ahmedabad@goldstarpower.com

 **100% Recyclable
Green Technology**

 **Spill Proof**

 **Extreme Weather
Performance**



A PRODUCT OF GOLDSTAR POWER LIMITED
www.goldstarpower.com




Features



- Maintenance Free & non-spillable sealed construction.
- Advanced AGM technology ensures maintenance free operation.
- Usage of high Grade pure Raw Materials ensures low self discharge and long shelf life characteristics.
- Low internal resistance and efficient discharge characteristics.
- Sealed construction of the battery allows perfect operation in any position.

compliance standards

IS 15549-2005
JIS C 8702-1:2003
IEC 60896 PART 1 & 2

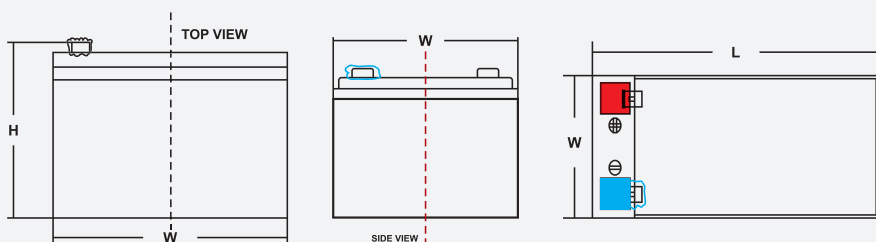

Deep discharge can
cause permanent
damage to the
battery

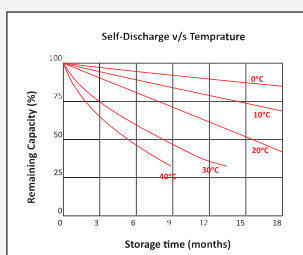

Battery Specification Chart

Model	Voltage (Volts)	Capacity in AH at 27 °C (@20 Hr.)	Dimensions in mm (±3 mm)			Maximum Charging Current (A)	Charging Voltage		Gross Weight in (Kg.)±2%
			L	W	H		Stand by Use (V)	Cycle Use (V)	
GSV-7	12	7.5	152	65	100	1.5	13.5 to 13.8 V at 27 °C (80 ° F)	14.1 to 14.4 V at 27 °C (80 ° F)	2.20
GSV-12	12	12	152	99	100	2.4			3.40

Discharge Characteristics

Model	Voltage (Volts)	Capacity in AH at 27 °C (@20 Hr.)	Discharge characteristic in Amps				
			C 20 to 10.5 V	C 10 to 10.5 V	C 5 to 10.5 V	C 3 to 10.5 V	C 1 to 10.5 V
GSV-7	12	7.5	0.37	0.71	1.3	1.9	4.70
GSV-12	12	12	0.6	1.14	2.0	3.0	7.60

